


Base bracket attachment diagram

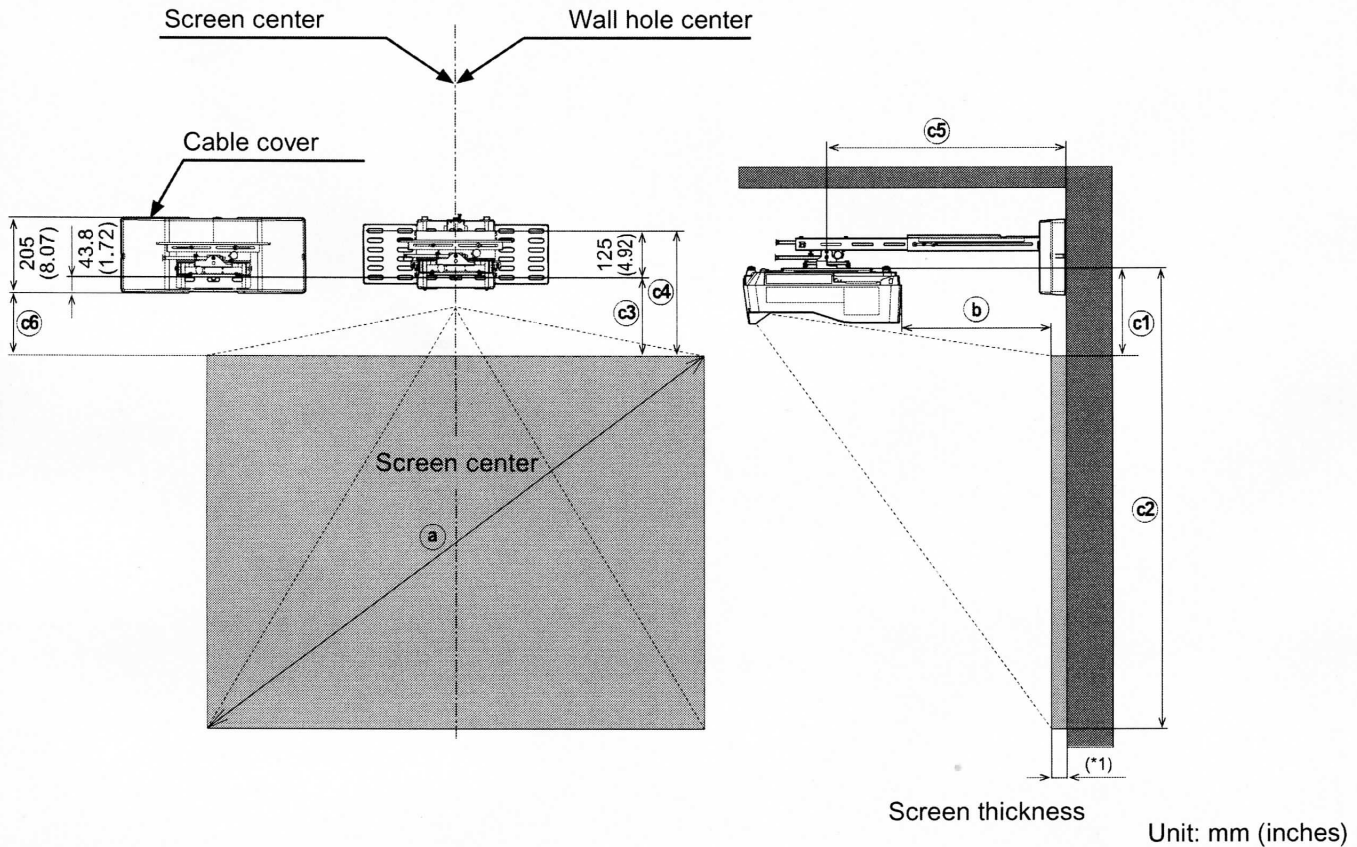

ENGLISH

Sheet projecting distance table

16:10 screen (Full screen: Reference value for 1,280 × 800 pixel image.)

a	b	c1	c2	c3	c4	c5	c6
Diagonal size (inches)	mm (inches)	mm (inches)	mm (inches)	mm (inches)	mm (inches)	mm (inches)	mm (inches)
70	149(5.9)	254.1(10.0)	1196.1(47.1)	226.2(8.9)	351.2(13.8)	398.7(15.7)	182.4(7.2)
80	219(8.6)	278.1(10.9)	1355.1(53.4)	250.2(9.8)	375.2(14.8)	468.7(18.5)	206.4(8.1)
90	289(11.4)	302.1(11.9)	1514.1(59.6)	274.2(10.8)	399.2(15.7)	538.7(21.2)	230.4(9.1)
100	359(14.1)	327.1(12.9)	1673.1(65.9)	299.2(11.8)	424.2(16.7)	608.7(24.0)	255.4(10.1)
110	429(16.9)	352.1(13.9)	1832.1(72.1)	324.2(12.8)	449.2(17.7)	638.7(25.1)	280.4(11.0)

4:3 screen (Full screen: Reference value for 1,024 × 768 pixel image.)

a	b	c1	c2	c3	c4	c5	c6
Diagonal size (inches)	mm (inches)	mm (inches)	mm (inches)	mm (inches)	mm (inches)	mm (inches)	mm (inches)
70	118(4.6)	244.1(9.6)	1311.1(51.6)	216.2(8.5)	341.2(13.4)	367.7(14.5)	172.4(6.8)
80	184(7.2)	267.1(10.5)	1486.1(58.5)	239.2(9.4)	364.2(14.3)	433.7(17.1)	195.4(7.7)
90	250(9.8)	290.1(11.4)	1662.1(65.4)	262.2(10.3)	387.2(15.2)	499.7(19.7)	218.4(8.6)
100	316(12.4)	313.1(12.3)	1837.1(72.3)	285.2(11.2)	410.2(16.1)	565.7(22.3)	241.4(9.5)
110	382(15.0)	336.1(13.2)	2012.1(79.2)	308.2(12.1)	433.2(17.1)	631.7(24.9)	264.4(10.4)

(b) Screen front from projector back (c1) Screen top from bracket mounting surface (c2) Screen bottom from bracket mounting surface (c3) Screen top from bottom mounting hole on wall (c4) Screen top from top mounting hole on wall (c5) Bracket center from wall surface (c6) Screen top from bottom of cable cover

(*1) For a screen thickness of 50mm, a maximum of up to 110 inches for XGA images and 100 inches for WXGA images can be projected.

For a screen thickness of 10mm, a maximum of up to 110 inches for WXGA images can be projected.

* Use of the supplied template sheet will facilitate positioning of the base bracket.

Note: Note that projection distance (b) will vary by ±3% depending on what product is used.